


LH25





DC24V Modular Specification



LH25 DC 24V

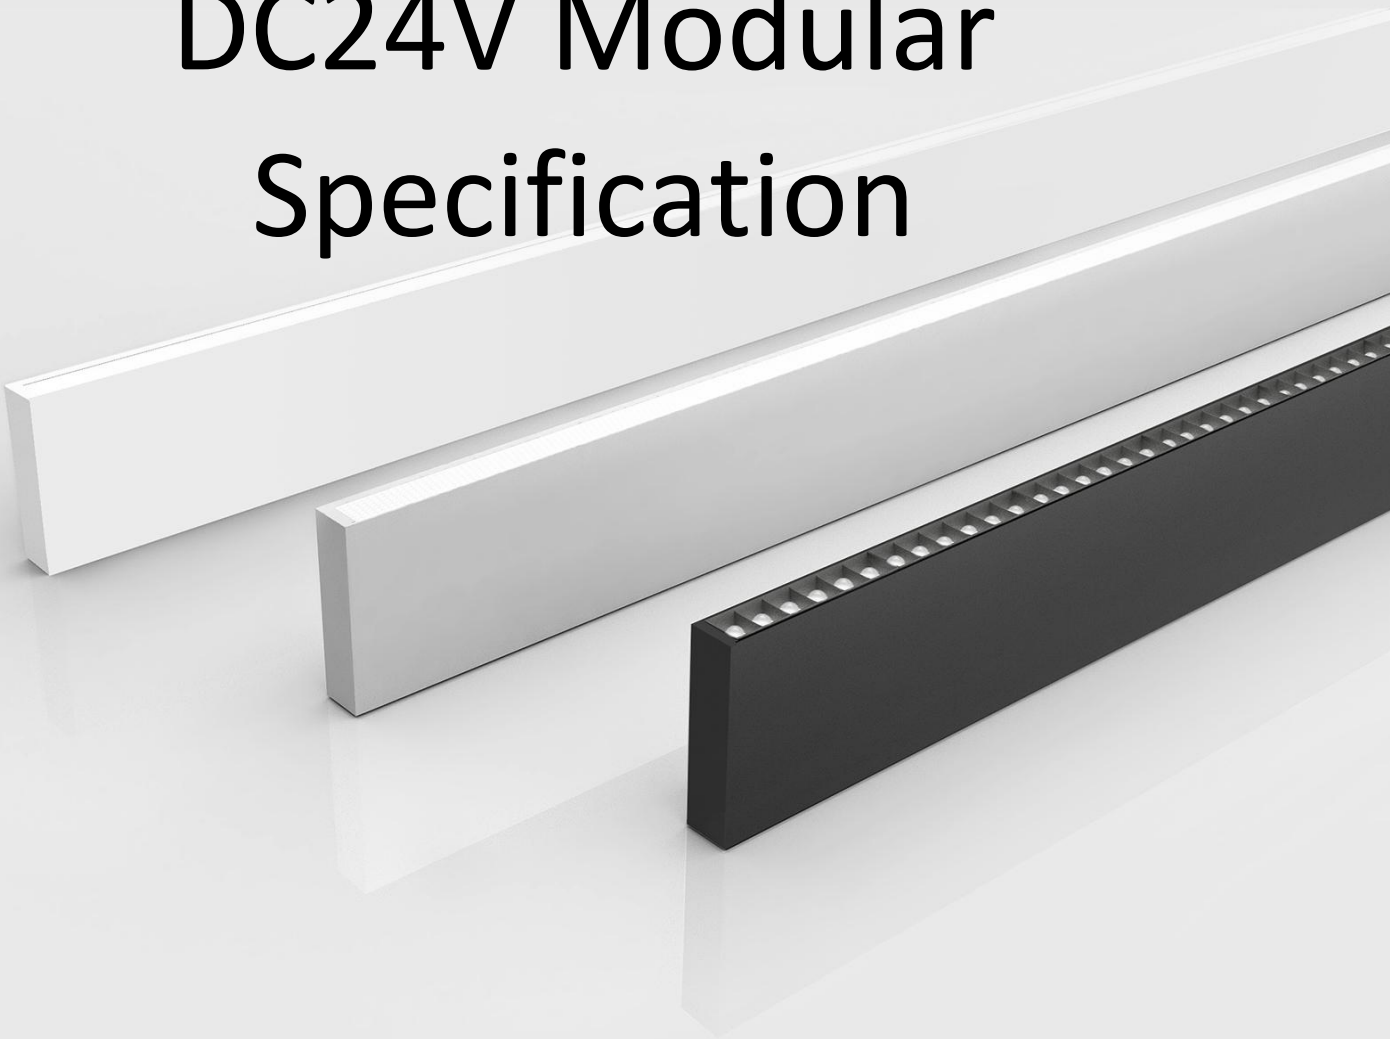

- Up and down lighting design with suspension way , 25mm slender lighting surface.
- 105 Lm/w high light efficiency design , lumen output up to 4200 Lm/m.
- Multiple standard corner (L type , X type , T type optional) available for free connection.
- Multiple light distribution options (Diffuser , Microprism , Grating 30° , Grating 60°) to meet variety application requirements.
- Electric wire& suspension wire with two-in-one design, invisible and beautiful.

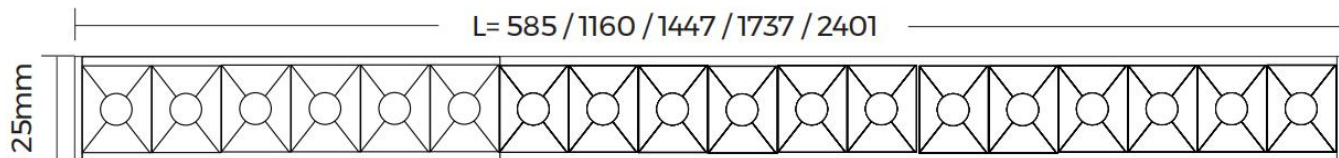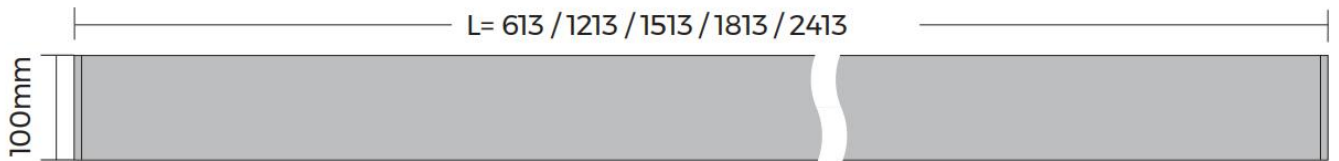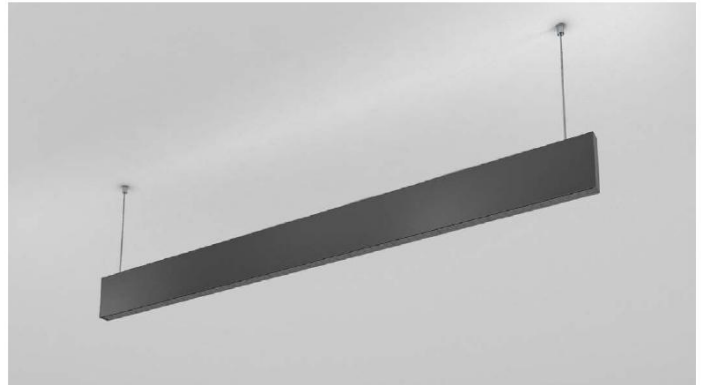


- Up and down lighting design with suspension way , 25mm slender lighting surface .
- 105 Lm/w high light efficiency design , lumen output up to 4200 Lm/m .
- Multiple standard corner (L type , X type , T type optional) available for free connection
- Multiple light distribution options (Diffuser , Microprism , Grating 30° , Grating 60°) to meet variety application requirements
- Electric wire& suspension wire with two-in-one design, invisible and beautiful

Optical & electronic data


	600mm	1200mm	1500mm	1800mm	2400mm	L*(277*277mm)	T*(529*277mm)	X*(529*529mm)
Diffuser	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
Microprism	Up: 12W/950LM Down: 12W/1250LM	Up: 24W/1900LM Down: 24W/2500LM	Up: 30W/2400LM Down: 30W/3150LM	Up: 36W/2900LM Down: 36W/3750LM	Up: 48W/3850LM Down: 48W/5000LM	Up: 11W/880LM Down: 11W/1155LM	Up: 16W/1280LM Down: 16W/1680LM	Up: 21W/1680LM Down: 21W/2205LM
Grating 30°	Up: 12W/950LM Down: 12W/850LM	Up: 24W/1900LM Down: 24W/1700LM	Up: 30W/2400LM Down: 30W/2100LM	Up: 36W/2900LM Down: 36W/2500LM	Up: 48W/3850LM Down: 48W/3500LM	/	/	/
Grating 60°	Up: 12W/950LM Down: 12W/700LM	Up: 24W/1900LM Down: 24W/1400LM	Up: 30W/2400LM Down: 30W/1800LM	Up: 36W/2900LM Down: 36W/2300LM	Up: 48W/3850LM Down: 48W/3100LM	/	/	/
Blind cover	/	/	/	/	/	Available	Available	Available

Remark:


- 1、 the tolerance of output data can be vary up to 10%;
- 2、 the output data is typical value;

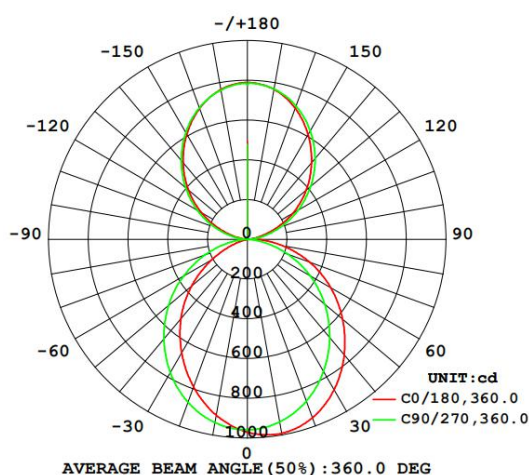


1.2m luminaire with Diffuser

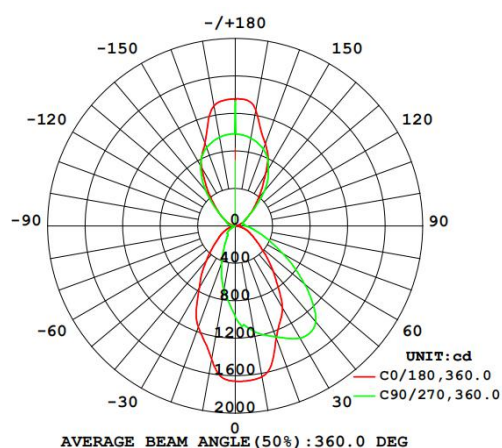

1.2m luminaire with Microprism

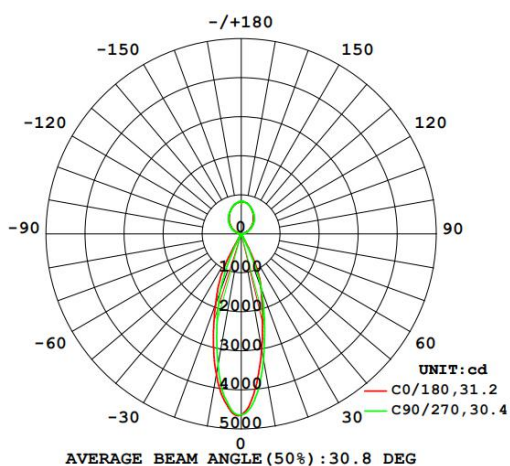

1.2m luminaire with Grating 30°

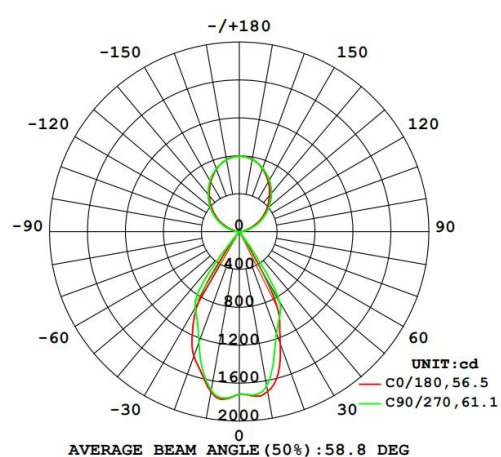


1.2m luminaire with Grating 60°

Packing:



Cover	Length	Type	Size(mm)	Pcs/bundle	NW(kg)	GW(kg)	Size (whole package)
Diffuser / Microprism,	613mm	BOX	690*123*40mm	6pcs	/	/	690*275*230mm
	1213mm	BOX	1290*123*40mm	6pcs	/	/	1290*275*230mm
	1513mm	BOX	1590*123*40mm	6pcs	/	/	1590*275*230mm
	1813mm	BOX	1890*123*40mm	6pcs	/	/	1890*275*230mm
	2413mm	BOX	2580*123*40mm	6pcs	/	/	2580*275*230mm
Grating	585mm	BOX	660*123*40mm	6pcs	/	/	560*275*230mm
	1160mm	BOX	1260*123*40mm	6pcs	/	/	1260*275*230mm
	1447mm	BOX	1520*123*40mm	6pcs	/	/	1520*275*230mm
	1737mm	BOX	1810*123*40mm	6pcs	/	/	1810*275*230mm
	2401mm	BOX	2580*123*40mm	6pcs	/	/	2580*275*230mm

Description about label information

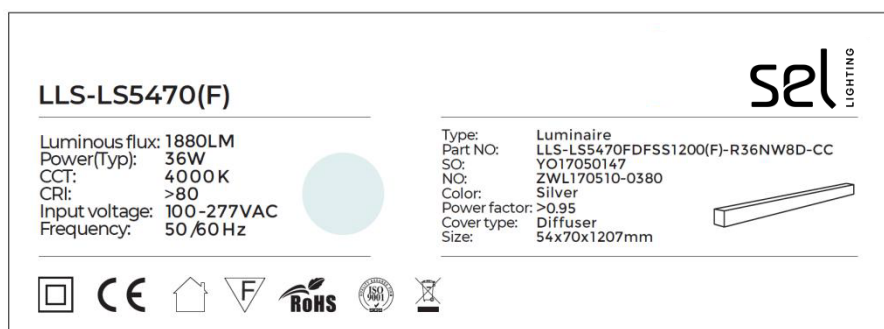

Ordering code:

Category		Series			Section Size		Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length		Light Source Type			Light Source Power		CCT		CRI		Power Type		Package		Label Type	
Stylish Lighting system	LLS	-	Pendant Lighting upward & downward	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	-	24VDC flexible strip	F	40W/m	40	2700K	SW	>80	8	No Power	X	-	S E L Individual	L	S E L	L	
							Micro-prism	P	Black		W	1200MM			24VDC Rigid module	R	3000K	WW	>90		9	Customized	S										
							Grating	G	30°		F	White	B		1500MM		4000K	NW															
									60°		H				1800MM		5000K	DW															
									2400MM						6500K	W																	
LLS		-		LH	25	F	D	X	S	S	2400	-	F	40	NW	8	X	-	L	L													

Ordering luminaires kits

LLS-LH25FDXSS2400-F40NW8X-LL



Attentions:

- Please install the product in the right environment as much as possible;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.