




GLS40




sel
LIGHTING

LH40G

LH40 as professional luminaire, integrates with beautiful structure design, creative optical & thermal design, new material and intelligent control, can widely used for indoor general lighting.

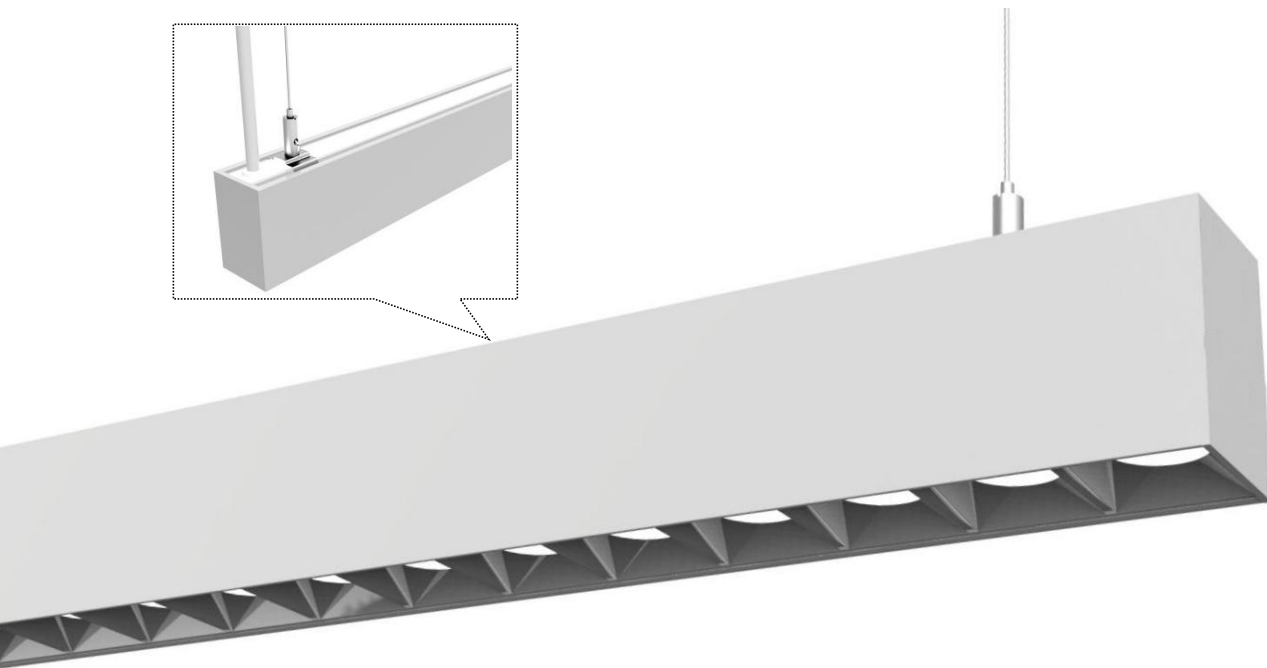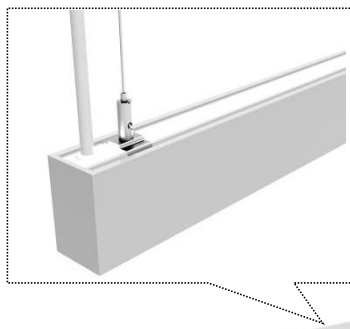

- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black/white/silver.
- LM80 certified light source, Osram LED, life >50000H
- Built-in efficient and safe flicker-free dimming power supply, Support 0-10V dimming or Dali dimming
- CRI 90+ option available
- Lighting upward&downward

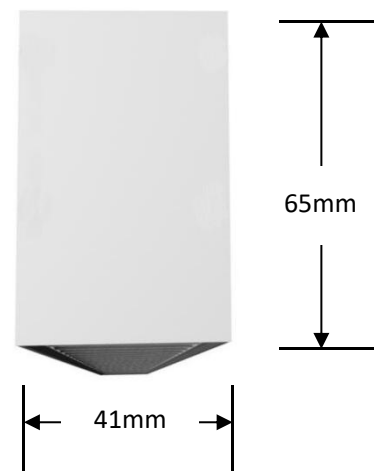

Optical & electronic data:


Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimm ing	PF	Power (w)	Efficiency (lm/w)
GLS-LH40GXXSS1200-T47 NW8B-DC	1147mm	3000K	(up)1350lm (down)2940lm	>80	12°、24°、 38°、50°	200-240VAC 50Hz/60Hz	0-10V/ DALI	>0.9	47W	(up)104 (down)82
		3500K	(up)1370lm (down)3000lm							(up)106 (down)84
		4000K	(up)1400lm (down)3060lm							(up)108 (down)85
GLS-LH40GXXSS1500-T59 NW8B-DC	1432mm	3000K	(up)1680lm (down)3670lm	>80	12°、24°、 38°、50°	200-240VAC 50Hz/60Hz	0-10V/ DALI	>0.9	59W	(up)105 (down)82
		3500K	(up)1720lm (down)3750lm							(up)107 (down)83
		4000K	(up)1750lm (down)3830lm							(up)109 (down)85
GLS-LH40GXXSS1800-T70 NW8B-DC	1717mm	3000K	(up)2020lm (down)4410lm	>80	12°、24°、 38°、50°	200-240VAC 50Hz/60Hz	0-10V/ DALI	>0.9	70W	(up)106 (down)82
		3500K	(up)2060lm (down)4500lm							(up)108 (down)83
		4000K	(up)2100lm (down)4590lm							(up)111 (down)85

Remark:


- 1、 the output data is based on the testing result of 1.2m luminaires
- 2、 the tolerance of output data can be vary up to 10%;
- 3、 the output data is typical value;

◆ 1.2m luminaire Lighting upward and downward with grate (GLS-LH40G)

AAI Figure

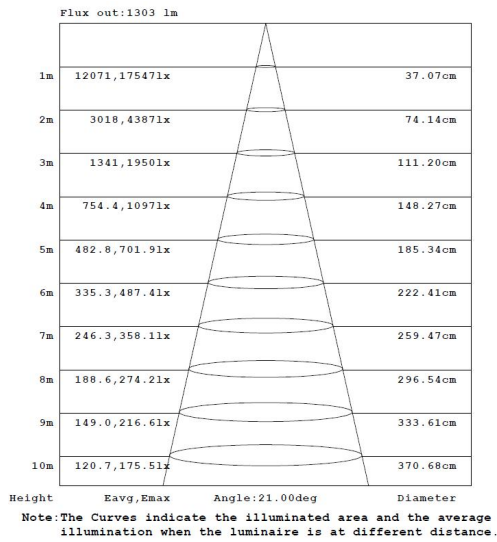


Luminous intensity distribution diagram

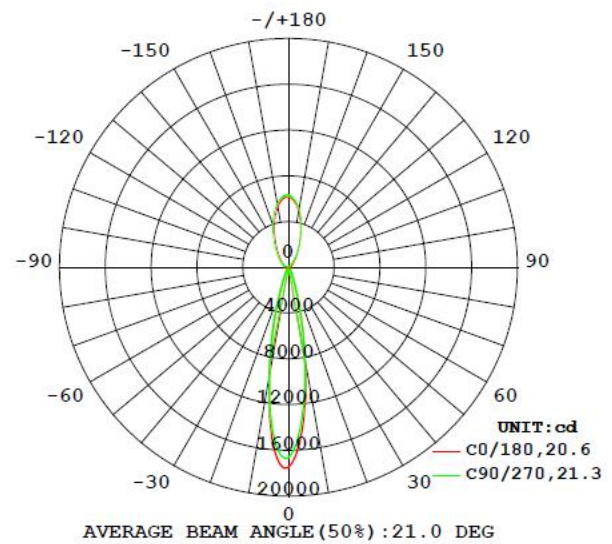

Packing:

◆ The whole package

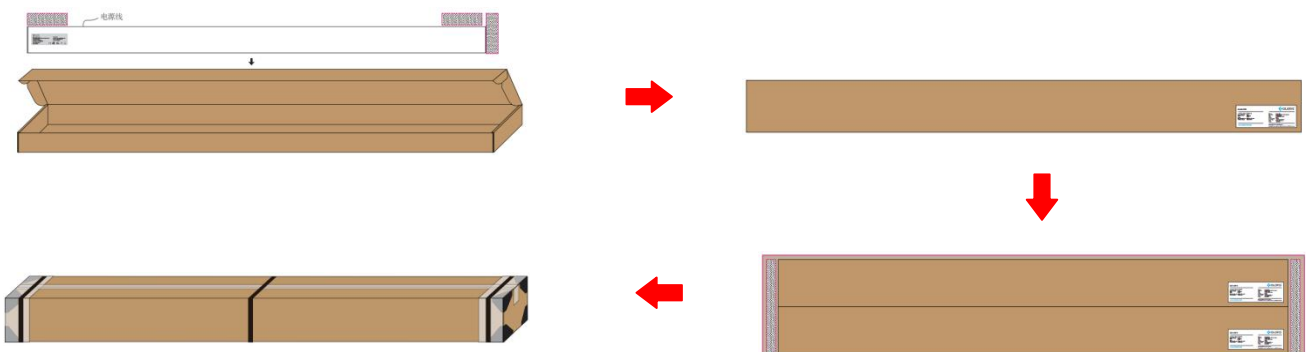

Model	Type	Demension (individual package)	Pcs /bundle	NW (Kg)	GW (Kg)	Demension (whole package)	CBM (m³)
GLS-LH40GXXSS1200-T47 XX8B-DC	box	1180*90*55mm	4	11.28	13.8	1210*215*155mm	0.04
GLS-LH40GXXSS1500-T59 XX8B-DC		1560*90*55mm	4	14.08	17.14	1590*215*155mm	0.05
GLS-LH40GXXSS1800-T70 XX8B-DC		1750*90*55mm	4	16	19.56	1780*215*155mm	0.06

◆ Description about label information

GLS-LS70			
Luminous flux: 1900LM Power(Typ): 18W CCT: 6000K CRI: >80 Input voltage: 100-277VAC Frequency: 50/60Hz		Type: Luminaire Part NO: GLS-LS70DAHES-18W8N-LC SO: Y017050147 NO: ZWL170510-0380 Color: Silver Power factor: >0.95 Cover type: UGR filter diffuser Size: 73x80x1210mm Date: 20181220	
		Terminal block not included. Installation must be performed by a qualified person.	

Ordering code:

Category	Installation	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-Light Source Type	Type Power of Luminaire	CCT	CRI	Power Type	Package	Label Type	
General Lighting System	Pendant	40 Series	Grate	12°	No Carrier	White	Standard End Cap	1147mm	-Constant Current Rigid	47W	3000K	CRI>80	0-10V	Individual Packing	SEL	
GLS	-LH	40	G	E	X	W	S	1200	-T	47	WW	8	B	-D	L	
				24°				1432mm		59W						
				F		Black		1500		59	3500K				DALI	Customized
				38°				1717mm		70W						
				G		B		1800		70	PW		A		S	
				50°							4000K					
				H		Silver					NW					
						S										
GLS	-LH	40	G	H	X	W	S	1200	-T	36	NW	8	B	-D	L	

Attentions:

- ◆ Please install the product in the right environment as much as possible;
- ◆ Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- ◆ Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- ◆ This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.